

## HANDLE-O-METER



The Handle-O-Meter measures "handle" which is the combined effects of flexibility and surface friction of sheeted material such as nonwovens, tissue, toweling, film and textiles. The data generated has been shown to correlate well with the actual performance of the material in production processes and finished product performance.

Measurements are obtained effortlessly. Simply place the test sample over the slot that extends across the instrument platform and press test. A penetrator beam pivots on a cam, engages the sample and forces it into the slot. An LVDT, in conjunction with a torsion bar, measures the resistance encountered by the penetrator blade as it moves into the slot. Stiff materials offer greater resistance to the motion of the beam as it moves into the slot.

Rough materials also exert resistance as they are dragged over the edge of the slot. The combined

resistance is exported on a 2 x 40 character display.




Two interchangeable beams are available which provides versatility for testing different materials. Quickly change between a 100 gram and 1000 gram beam. With auto ranging, the Handle-OMeter immediately detects the beam in use and adjusts the range and resolution accordingly. The slot width is also adjustable to accommodate samples of varying thicknesses.

Test modes can be quickly set for single, double or quadruple measurements. The average is automatically calculated for double or quadruple tests.

Advanced software enables the unit to compute and display qualitative analysis of the test results including averaging, standard deviation and the high & low readings of a series of tests.

## Features

- » Touch Screen Controls
- » Adjustable slot openings: 5, 10, 20 mm and 1/4 in
- » Interchangeable beams: 100 gram & 1000 gram
- » Auto-ranging
- » Enhanced Statistical Analysis with MAP-4 Software
- » RS-232 Output and Serial Port
- » Industry Standards:
  - » ASTM D 2923, D 6828-02
  - » TAPPI T 498
  - » INDA IST 90.3
  - » EDANA WSP 90.3

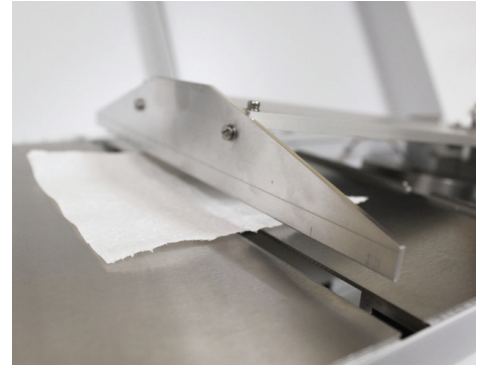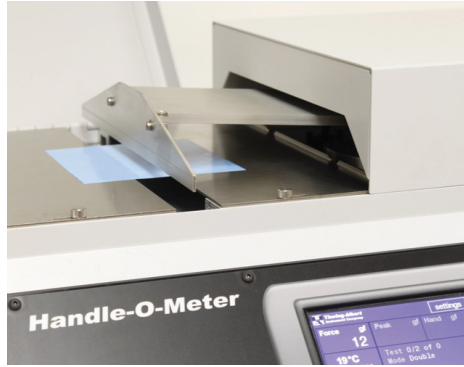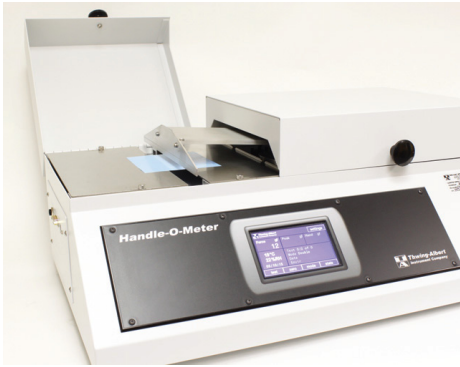

## Technical specifications

- » Measuring range:
  - Standard unit: 0-100 grams
  - Heavy duty unit: 0-1000 grams
- » Measurement resolution
  - 1,000 gram beam = 1 gram
  - 100 gram beam = 1/10th of a gram
- » Slot opening
  - 5, 10, 20 mm and 1/4 "
- » Display
  - 2 x 40 LCD digital display
- » Power requirements
  - Standard: 115 V ± 10 %, 60 Hz
  - Optional: 220 V ± 10 %, 50 Hz

## Physical specifications

- » Dimensions (D x W x H)
  - 368mm x 587mm x 229mm (14.5" x 23 1/8" x 9")
- » Gross Weight
  - 24.5 kg (54 lb)
- » Net Weight
  - 22.2 kg (49 lb)

## Options

### Teflon Coated Plates

Teflon plates are used primarily with plastic film to reduce

static friction.

### Serial Printer

A formatted report can be printed on demand, showing test results and a statistical analysis for a group of tests.

### Chart Recorder

An electronic strip chart recorder provides another means

of recording test results.

### MAP-4 Software

Available to connect the Handle-O-Meter to a computer for realtime test results and detailed data analysis.