



Measure




Improve



Service

WASAG APPLICATOR

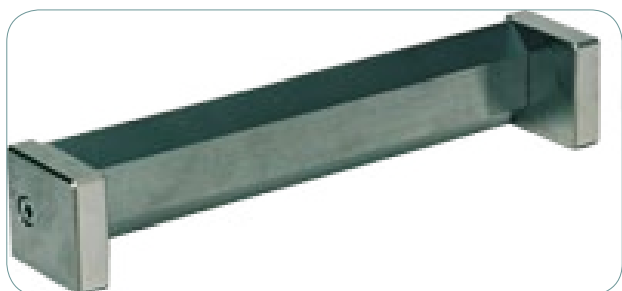

Applicator for the preparation of uniform films of coating materials, adhesives and similar products on plane substrates for testing purposes.

Handling

- Only use on solid substrates, such as test panels, test charts, ...
- Place the applicator with the desired gap height on the substrate to be coated
- Pour the product to be tested in front of the applicator in drawing direction and apply with uniform speed (about 25mm/s)
- Afterwards clean the applicator with a solvent

Options

- Automatic film applicator coater
- Precision-vacuum plates
- Test charts
- Calibration and certification (incl. certificate)

Material

Stainless steel

Standards

ASTM D 823

Features

The coating cannot get under the guide shoes and thereby adulterate the applied film thickness

Standard extent of delivery

- 1 applicator
- 1 certificate of manufacturer
- 1 carrying case

Technical specifications

Version	Film width	Gap height
ZWA 2121.80	80 mm	2 on request from 15 µm to 2 000 µm (in steps of five) (0,6 mil - 78,7mil)
ZWA 2121.120	120 mm	
ZWA 2121.180	180 mm	
ZWA 2121.230	230 mm	
ZWA 2121.S1	on request: from 20 mm to 500mm	with different gap heights on side (stairs) from 15µm to 2 000µm (in steps of five)
ZWA 2121.S	on request: from 20 mm to 500mm	